




DATA SHEET
HS128B471KBD7Y1
470PF, 400VAC, Y1, Y5P, $\pm 10\%$

1) DIMENSIONS

- ❑ Lead Diameter - 0.508 mm
- ❑ Lead Spacing (LS) - 7.50 mm
- ❑ Diameter (D) - 12.0 mm Max
- ❑ Thickness (T) - 4.0 mm Max

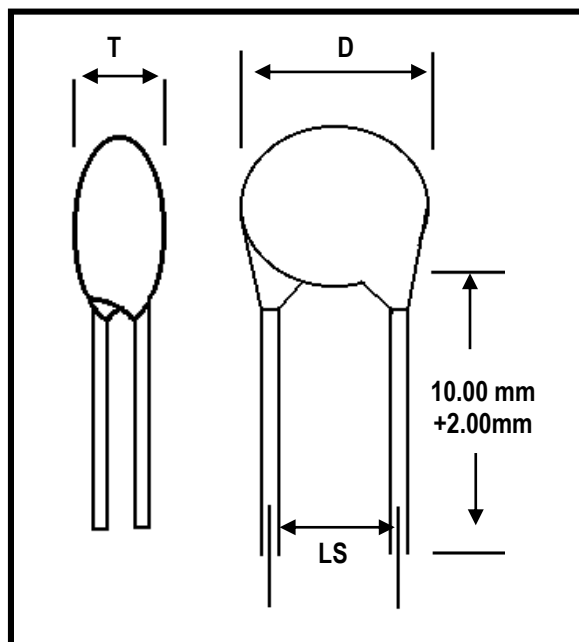

2) Technical Specifications

- ❑ Capacitance Range - 470 PF
- ❑ Temperature Characteristics - $\pm 10\%$. (Y5P)
- ❑ Tolerance - $\pm 10\%$ (K)
- ❑ Voltage Rating - 400 VAC
- ❑ Dielectric Strength - 4000VAC
- ❑ Dissipation factor - 2.5% Max
- ❑ Test Frequency - 1 KHz @ 1 VRMS
- ❑ Operating Temp Range. - -25°C to $+85^{\circ}\text{C}$
- ❑ Insulation resistance - $>10\text{G ohm}$ at 500VDC